



LED UFO High Bay

A unique feature for this fixture is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.




Product Features


1. DLC 5.1 Premium with high luminous efficiency and low UGR;
2. Simple and stylish appearance;
3. Excellent heating dissipation;
4. Branded driver and LED's;
5. Microwave Sensor, PIR Motion sensor, Motion Sensor with Bluetooth;
6. Very complete accessories for option;
7. 0-10 diming.

Product Dimension

1. Rings type:

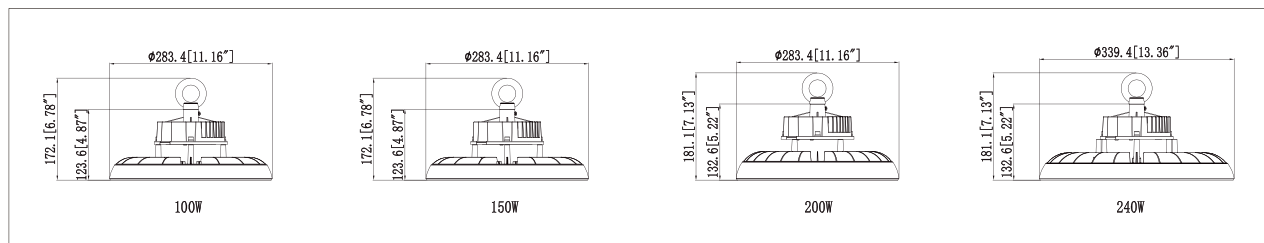

2. Hook type:

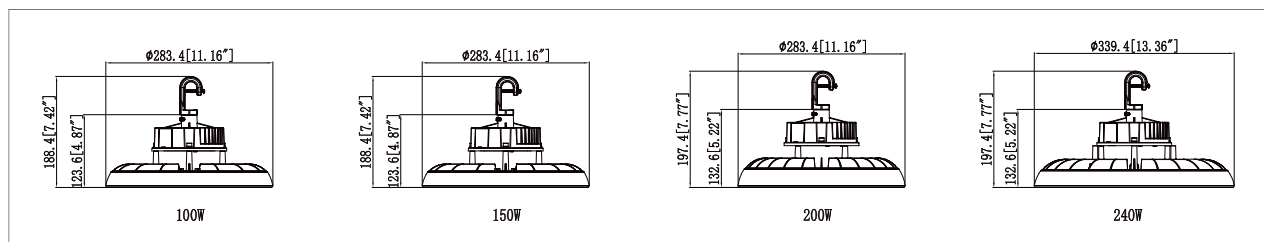

LED UFO HIGH BAY LIGHT - TS Series UFO11

// Product Parameters


Single power & CCT																					
Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life Span	Lamp Shell									
SS-UFO11-100W-XXX-X-XXK	100W	AC 120-277V	3500K 4000K 5000K	2835 LUMILEDS	85±5°	140lm/W	Ra>70	-40°F~113°F -40°C~45°C	-40°F~158°F -40°C~70°C	Wet Location	≥50000H	Black & White									
SS-UFO11-100W-XXX-X-XXK-CP	100W																				
SS-UFO11-100W-XXX-X-XXK(XX)	100W																				
SS-UFO11-150W-XXX-X-XXK-CP	150W																				
SS-UFO11-150W-XXX-X-XXK(XX)	150W																				
SS-UFO11-150W-XXX-X-XXK	150W																				
SS-UFO11-200W-XXX-X-XXK(XX)	200W																				
SS-UFO11-200W-XXX-X-XXK-CP	200W																				
SS-UFO11-240W-XXX-X-XXK	240W																				
SS-UFO11-240W-XXX-X-XXK(XX)	240W																				
SS-UFO11-100W-XXX-X-HV-XXK	100W	AC 120-347V																			
SS-UFO11-200W-XXX-X-HV-XXK	200W																				
SS-UFO11-240W-XXX-X-HV-XXK	240W																				
"XX " can be "35K" , "40K" , "50K" . "(XX)" can be (MS),(PIR),(BRT) to indicate Microwave Sensor, PIR Motion sensor, Motion Sensor with Bluetooth or blank to indicate without Motion Sensor. ""XXX"" can be 90 or 110 represent the Light-emitting angle, 90=90° 110=110°																					
Tunable power and single CCT																					
Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life Span	Lamp Shell									
SS-UFO11-150/120/100W-X-TP(XX)-Y	150/120/100W	AC 120-277V	3500K 4000K 5000K	2835 LUMILEDS	85±5°	140lm/W	Ra>70	-40°F~113°F -40°C~45°C	-40°F~158°F -40°C~70°C	Wet Location	≥50000H	Black & White									
SS-UFO11-200/150/100W-X-TP(XX)-Y	200/150/100W																				
SS-UFO11-240/200/150W-X-TP(XX)-Y	240/200/150W																				
SS-UFO11-150/120/100W-X-MV-TP(XX)-Y	150/120/100W	AC 120-347V																			
SS-UFO11-200/150/100W-X-MV-TP(XX)-Y	200/150/100W																				
SS-UFO11-240/200/150W-X-MV-TP(XX)-Y	240/200/150W																				
SS-UFO11-240/200/150W-X-MV-TP(XX)-Y	240/200/150W																				
"XX " can be "35K" , "40K" , "50K" . "Y" can be A, B, C, D or blank representing sensor type , A = PIR sensor, B = MS sensor, C = BRT sensor, D = PHB sensor, blank = no provide sensor.																					
CCT selectable																					
Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life Span	Lamp Shell									
SS-UFO11-150W-X-TC(XX)-Y	150W	AC 120-277V	3500K 4000K 5000K	2835 LUMILEDS	85±5°	140lm/W	Ra>70	-40°F~113°F -40°C~45°C	-40°F~158°F -40°C~70°C	Wet Location	≥50000H	Black & White									
SS-UFO11-200W-X-TC(XX)-Y	200W																				
SS-UFO11-240W-X-TC(XX)-Y	240W																				
SS-UFO11-150W-X-MV-TC(XX)-Y	150W	AC 120-347V																			
SS-UFO11-200W-X-MV-TC(XX)-Y	200W																				
SS-UFO11-240W-X-MV-TC(XX)-Y	240W																				
SS-UFO11-240W-X-MV-TC(XX)-Y	240W																				
"XX " can be "35K" , "40K" , "50K" . "Y" can be A, B, C, D or blank representing sensor type , A = PIR sensor, B = MS sensor, C = BRT sensor, D = PHB sensor, blank = no provide sensor.																					
Power & CCT selectable																					
Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life Span	Lamp Shell									
SS-UFO11-240/200/150W-X-TCP(XX)-Y	240/200/150W	AC 120-277V	3500K 4000K 5000K	2835 LUMILEDS	85±5°	140lm/W	Ra>70	-40°F~113°F -40°C~45°C	-40°F~158°F -40°C~70°C	Wet Location	≥50000H	Black & White									
SS-UFO11-200/150/100W-X-TCP(XX)-Y	200/150/100W																				
SS-UFO11-150/120/100W-X-TCP(XX)-Y	150/120/100W																				
SS-UFO11-240/200/150W-X-MV-TCP(XX)-Y	240/200/150W	AC 120-347V																			
SS-UFO11-200/150/100W-X-MV-TCP(XX)-Y	200/150/100W																				
SS-UFO11-150/120/100W-X-MV-TCP(XX)-Y	150/120/100W																				
SS-UFO11-240/200/150W-X-MV-TCP(XX)-Y	240/200/150W																				
"XX " can be "35K" , "40K" , "50K" . "Y" can be A, B, C, D or blank representing sensor type , A = PIR sensor, B = MS sensor, C = BRT sensor, D = PHB sensor, blank = no provide sensor.																					

// Product Application


Accessories mounting brackets		
<p>Wire Guard</p> 	<p>Aluminum Reflector</p> 	<p>PC reflector</p> 
<p>Microwave Motion Sensor</p> 	<p>Pandent mounting</p> 	<p>Ceiling with loop</p> 

// Installtion Instruction

1.Rings type:

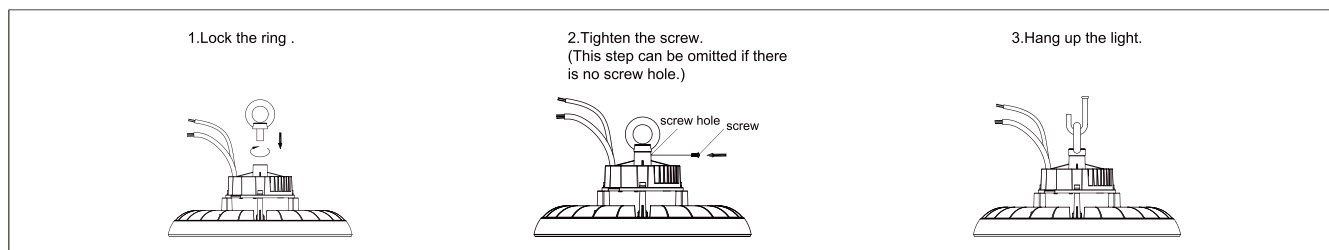


2.Hook type:

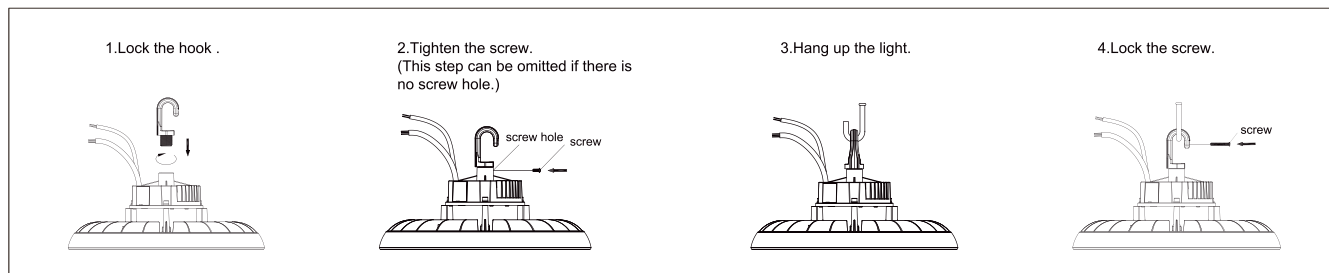


3. Adjust power and color temperature installation


1. Find out the rubber on the driver, as shown in Figure 1.

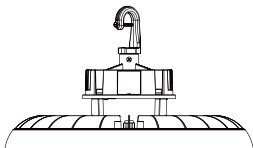


2. Remove the Rubber stopper, as shown in Figure 2.



3. Flip the color temperature switch to the desired color temperature, flip the power switch to the desired wattage, as shown in Figure 3.

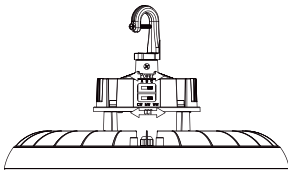


4. Restore the installation in the order of Step 321, as shown in Figure 4.

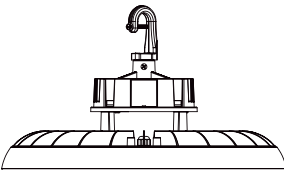


4. Sensor installation


1. Unscrew the plug screws using screwdrivers, as shown in Figure 1.

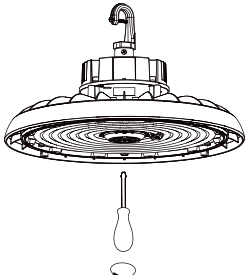


2. Remove the plug screw, as shown in Figure 2.

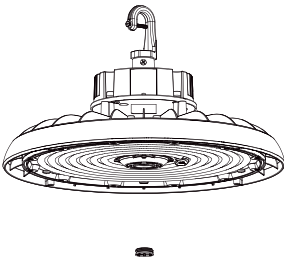

3. Screw the sensor into the base, as shown in Figure 3.



4. Sensor installation, as shown in Figure 4.




// Packing Information

Power	Outer box (L*W*H)	Oty/Ctn (pcs)	N.W./Ctn (kg/lbs)	G.W./Ctn (kg/lbs)	Remarks
100W	338*338*160mm 13.31**13.31**6.3"	1	1.9/4.19	2.7/5.95	0.5M cable
150W	338*338*160mm 13.31**13.31**6.3"	1	1.9/4.19	2.7/5.95	
200W	338*338*170mm 13.31**13.31**6.69"	1	2.2/4.85	3/6.61	
240W	397*397*170mm 15.63**15.63**6.69"	1	2.5/5.51	3.5/7.72	


Wiring Connection

Turn off the power, connect AC wire. Black wire to L, white wire to N, and green wire to PE.
Dimmer connection (with dimmable driver).

1. Compatible with 0-10V dimming;
2. Connect wires as below, purple wire is D+, pink wire is D-, cap red wire.

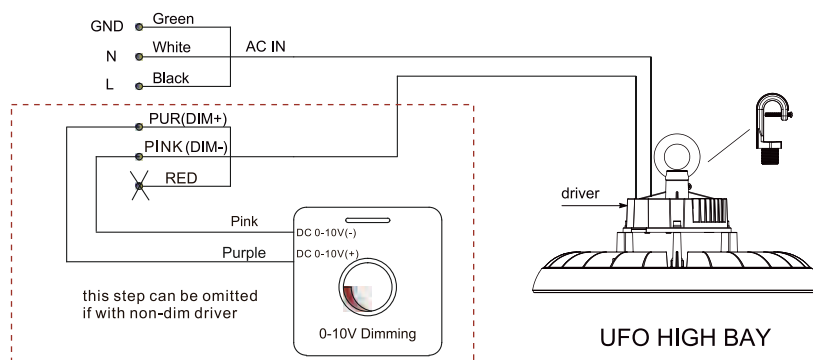

Applications

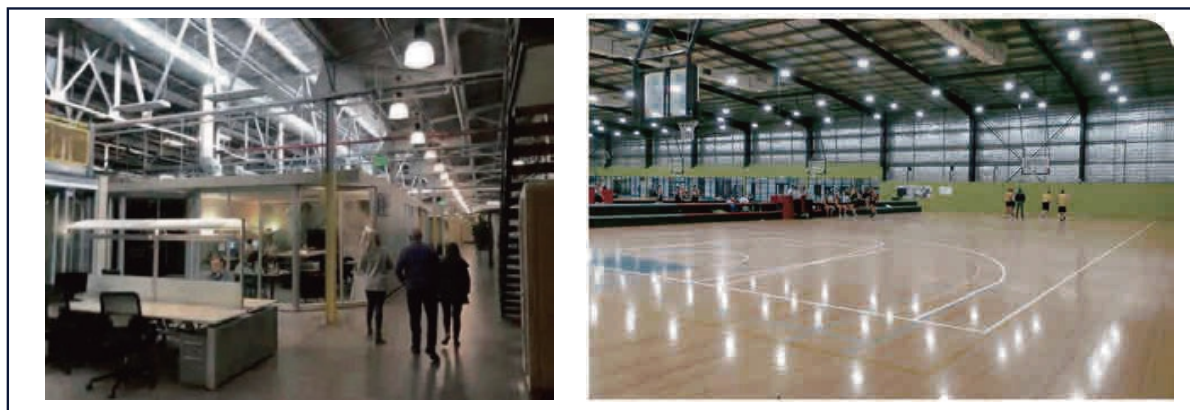

Note

1. Please let professionals install the lamp;
2. Please cut off the power supply if any abnormal situation;
3. Please clean the glass of high bay light regularly, to keep great lighting transmission;
4. Please clean the high bay light shell termly, to keep good heat dissipation;
5. Please use the dry cloth to clean it only, not by water or caustic solution;
6. Lamp earthing is necessary;
7. High voltage inside, please don't remove it in case of electric shock;
8. Glass accessory included, please take care of it when using and storage, avoid high pressure on it.