

LED LINEAR HIGH BAY LIGHT - WSD Series - 4' 150W




Features

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design, high quality and better cooling for LED $T_j < 85^{\circ}\text{C}$.
- Excellent Optics design, greatly improve the light utilization and evenness.
- Motion sensor Control Available (Option)

Product Applications

4FT 150W LED Linear High bay Light series can be widely used in indoor lighting(location), like Warehouse, Gymnasium, Supermarket, Workshop, Toll booth, Waiting rooms, platforms of railway station etc.

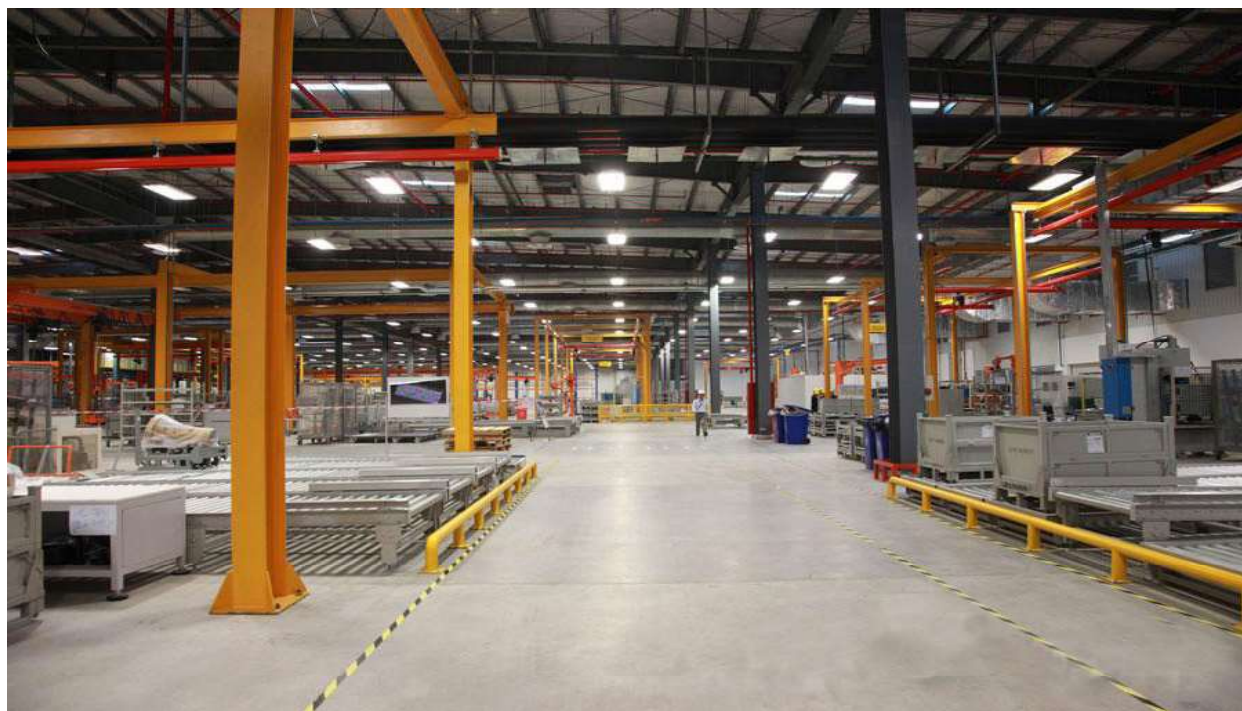



LED LINEAR HIGH BAY LIGHT - WSD Series - 4' 150W

Specifications

Unit : inch(mm)

Structure Features




- Shell materials: Aluminum & PC.
- Finish: White
- Net weight : 9.5Kg (21.0 lbs)
- Product Size: 1150mm*404mm*66.36mm
- Carton Size: 1200mm*470mm*155mm

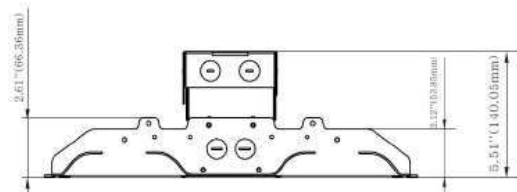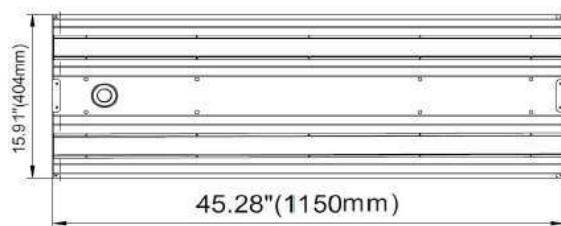

Technical Parameters

WSD-4FLHB15W27-XXK			
Power	150W	Lighting Angle	115°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	20690lm	Storage Temperature	-40 - +80°C
Color Temperature	3000K/4000K/5000K/5700K	Protection Level	Wet Location/IP20
CRI	Ra>80	LED Driver	SOSEN
Optional dimming function	1-10Vdc		

Photometry

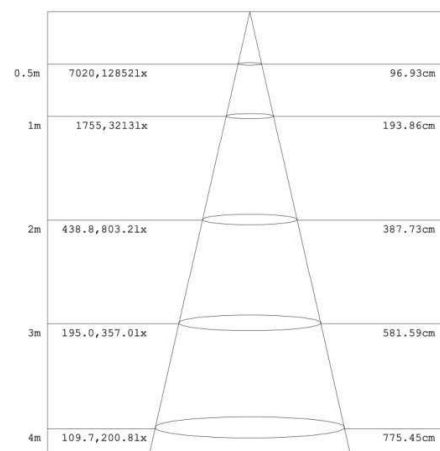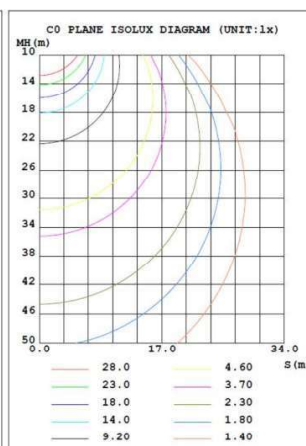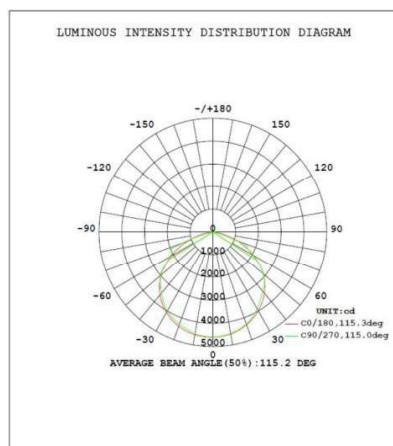

Example: WSD-4FLHB15W27-50K-D-M

WSD	LHB	15W	27	50K	D	M	1-10V
	Product	Power	Voltage	Color Temp	Finish	Motion sensor	Option
	LHB	15W(150W)	27	30K(3000K)	D	M	
	Linear High	20W(200W)	AC120-277V	40K(4000K)	Dark Bronze	Motion sensor	
	bay Light	30W(300W)		50K(5000K)	W		
				57K(5700K)±500K	White		