



100W 150W LED Semi-cutoff Wall Pack

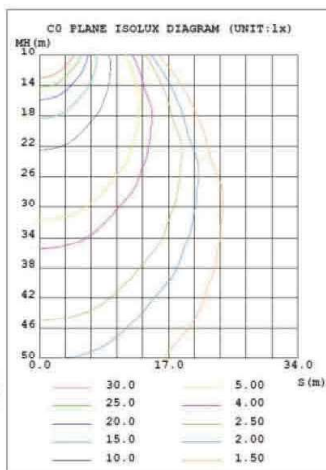

Light Distribution Curke

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

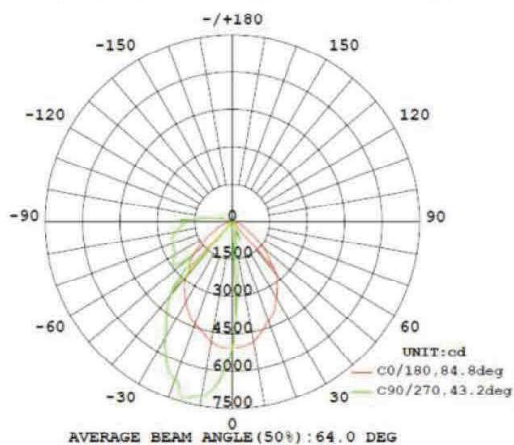


Product description

- Philips Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC100-277V;
- Cast aluminium cooling design, better cooling, light in weight, LED Tj < 85°C.
- Excellent lampshade design, greatly improve the light utilization and evenness.
- Photocell Control Available (Option)

Item number(s)

WSD-HWP10W27-xxK
 WSD-HWP15W27-xxK

Structure Features

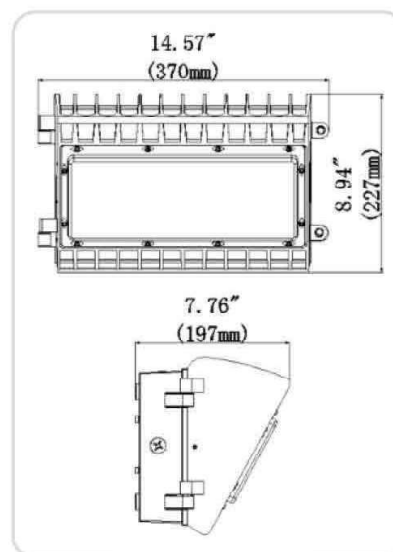

Technical Parameters

Power	Input Voltage	PF	CRI	Luminous Flux
100W 150W	100~277V or 347V	>0.95	Ra>80	11000Lm 16000Lm
Protection Level	Lighting Angle	Working Life	LED Chips	
Wet Location/IP65	60°*90°	>50000 hrs	Philips	