





Humanized Design Hidden in the Details



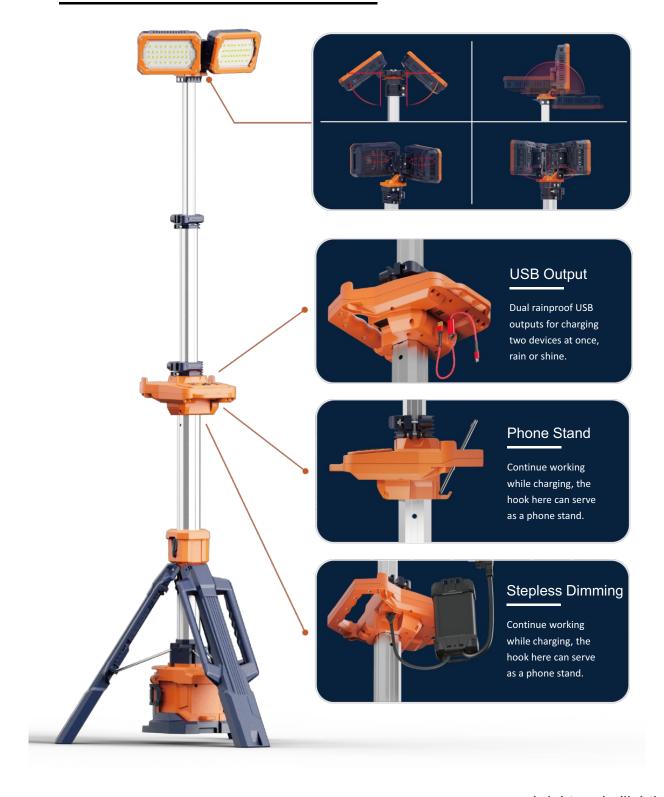

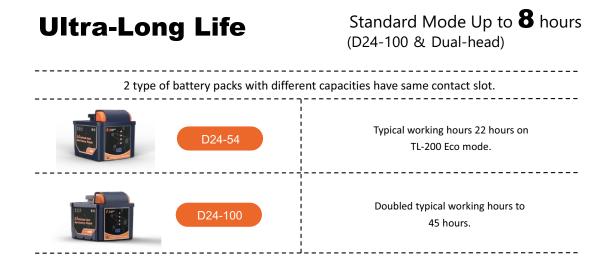


Two Options Available Single Head or Brighter Dual-Head Version





Dual-head

0-11,000LM Stepless Dimmable		
Turbo	5,000LM 3,000LM	
Balanced	1,800LM	
	Steples: Turbo Standard	



* 'Brightness' represents the center point illuminance value of the lighting direction.










Specifications

TL-200 Dual head		
Hight	1m~2.3m	
Weight	6.3Kg (Fitting only)	
Power Supply	D24 series battery pack / AC 100-277V	
Lumens	0 - 11,000Lm	
Run Times	>8 hours (Standard mode, D24-100)	
IP Grade	IP66	
Output(USB)	5V 2A (2 Dock)	

TL-200 Single head		
Hight	1m~2.3m	
Weight	5.9Kg (Fitting only)	
Power Supply	D24 series battery pack	
Lumens	0 - 3,000Lm	
Run Times	>8 hours (Standard mode, D24-100)	
IP Grade	IP66	
Output(USB)	5V 2A (2 Dock)	

Size (mm)

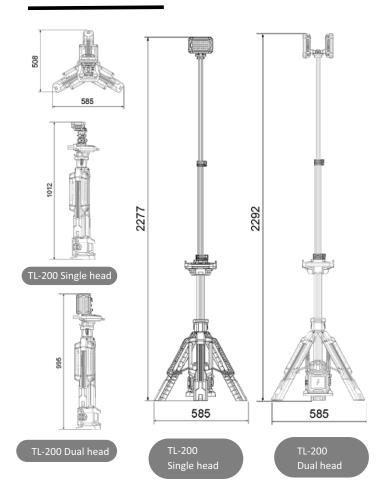

Package

Model	TL-200 Single head	TL-200 Dual head
Size of Carton	109x26x33cm	109x26x33cm
Gross Weight of Carton	7.5KG±5%	8.0KG±5%
PCS/Cart	1	1

