BRIGHTWAY LED Lighting

TL-400

Deployable portable lighting in one
bespoke robust package.

Portable Light Tower

Lighter, Brighter, Faster Deployment

Multiple Lighting Distribution Settings

Single latch to release tripod

Deploy or fold in seconds.

180°

180°

330°

360°
up/ down/ left/ right adjustable

In built damping mechanism for ease of adjustment to cover lighting area required.

Self-locking Pole

Drag & Lock at any position, contraction in one push.

Press down to fold the pole

## Ultra-long

Standard Mode Up to **20** Hours

(3xD24-100)

Control Board

Power

DIM+

DIM -

Battery

Power

USB

AC Plug
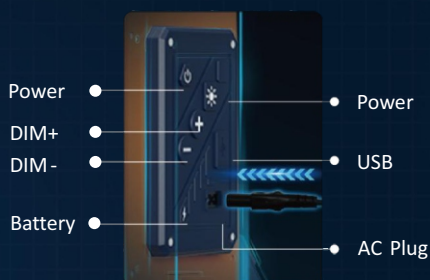
Applications

Emergency

Infrastructure

Railway

Events

Maintenance

Mining

Sport

Construction

BRIGHTWAY LED Lighting
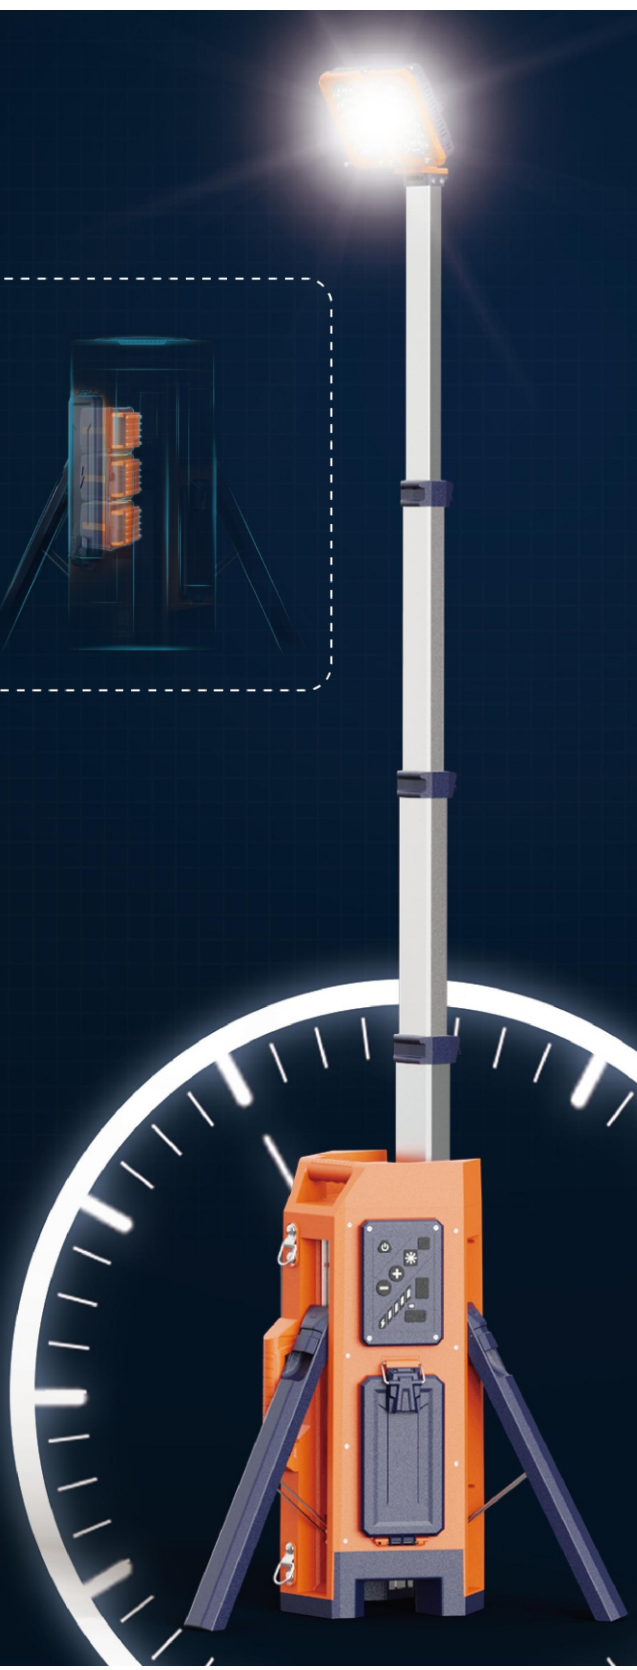
AC Powered Up To

15,000lm

Battery-powered Up To

8,000lm

Brightness

| 490Lux |
| 120Lux |
| 29Lux |
| 7Lux |

40m — 20m — 10m — 5m — 0m

* 'Brightness' represents the center point illuminance value of the lighting direction.
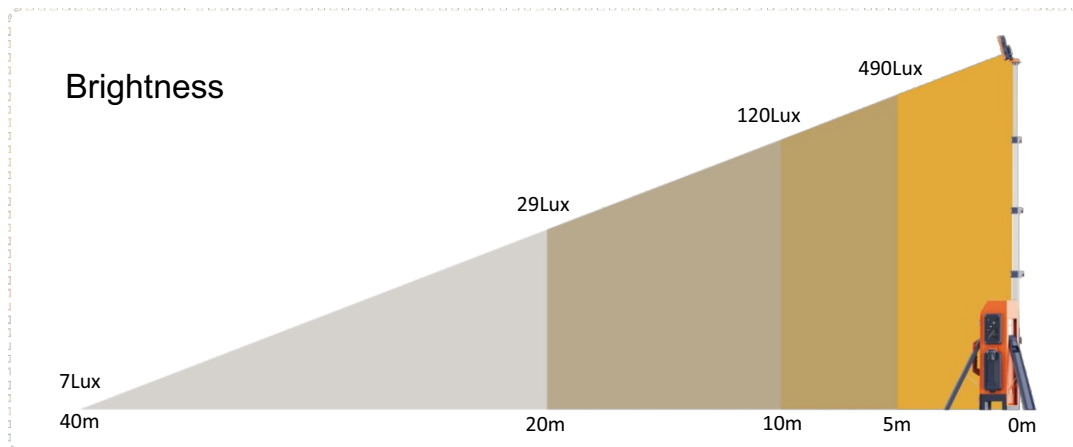
AC	0-15,000LM Stepless Dimmable	
Battery (4 Mode)	Turbo	8,000LM
	Standard	5,000LM
	Balanced	3,000LM
	Eco	800LM

Lighting Area 1100 ㎡

www.brightwayledlighting.com
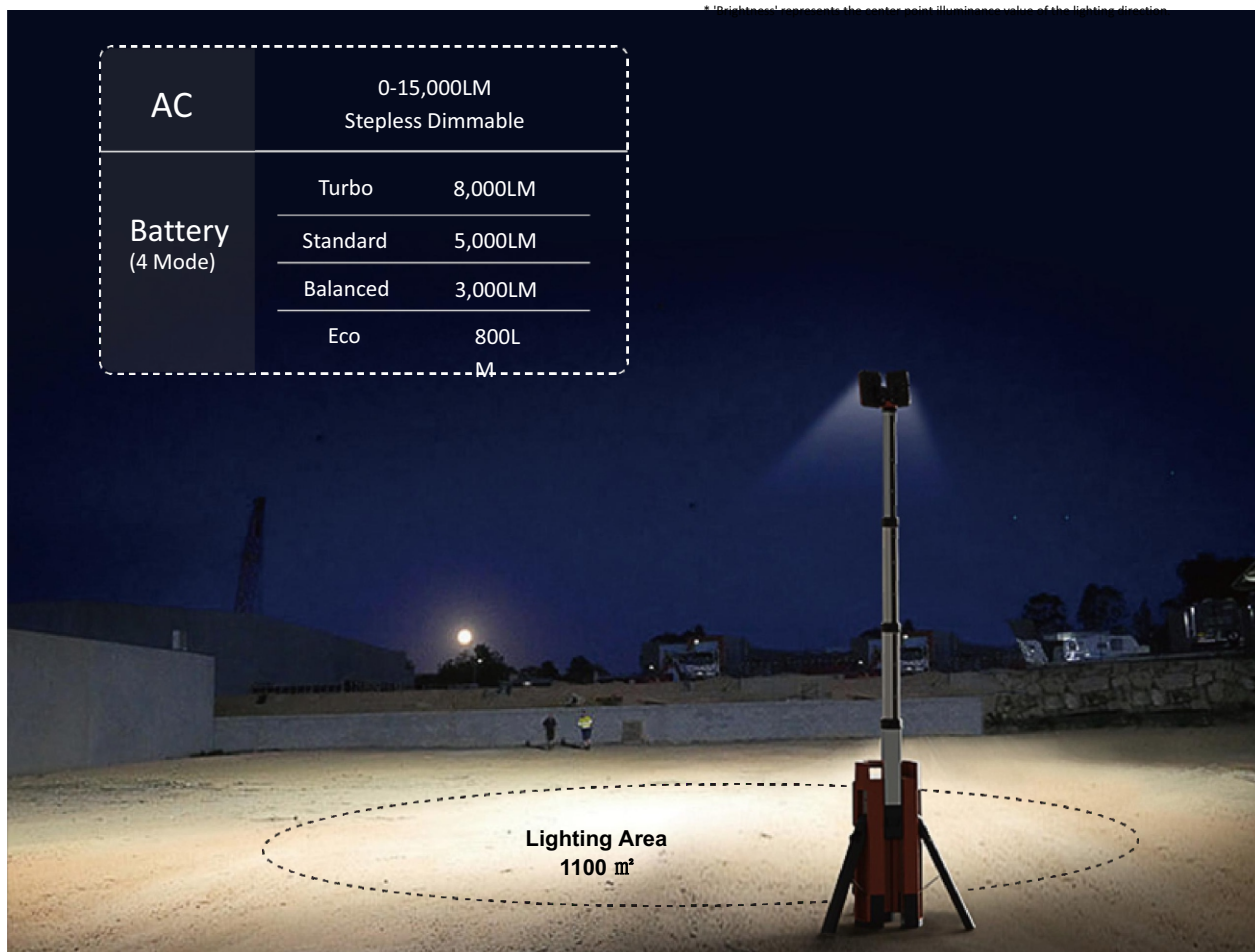
One-person Operation

Transport, deploy, adjust lighting in seconds with one operator.

Dual handle & strap available, 10Kg.

2.2m

1.75m

Optional Accessories

9 Bay Simultaneous Rapid Charger (TKC-9)

Carry 9 battery packs, charge them for off-grid light tower operation for up to a week.

Achieve 15000LM full brightness with the driver, or operate wirelessly using a battery and charger.

Cover all possibilities with a choice of Power Options.

Battery(D24 Series)

TL400 is a main light source that doubles as a USB charger for T2 headlamps, S3 flashlights, and mobile devices.

Fully equipped for any challenges in the dark!

Charger (MC-2)

Driver (X1-75-56BH)

Charger (MC -1)

S3 Flash Light

T2 Head Light

Specifications

TL-400

Hight	64.5cm~220cm
Weight	10Kg (Fitting only)
Power Supply	Battery / AC 100-277V
Lumens	0 - 15,000Lm
Run Times	>20 hours (Standard mode, D24-100)
IP Grade	IP65
Output(USB)	5V 2A (2 Dock)
Battery System	D24-100

Battery (D24-100)

Rated Power	98Wh
Rated Voltage	24.5V
Rated Capacity	4.0Ah
Working Temperture	-10~50℃
Working Humidity	1~98%

Size (mm)
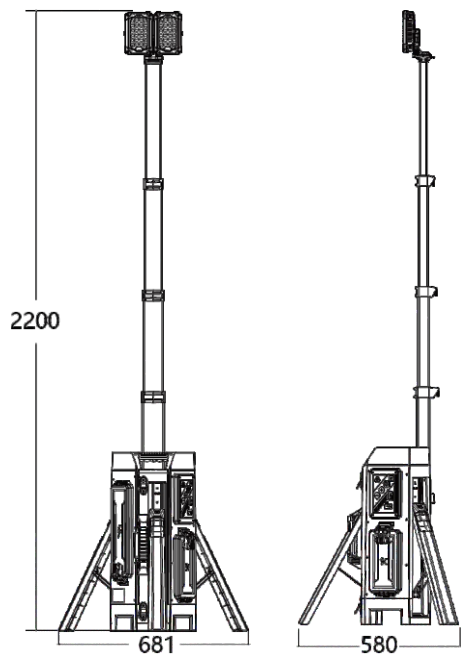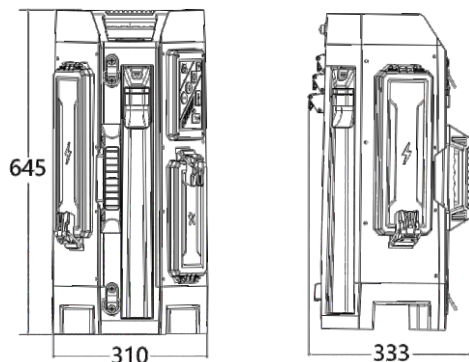
Package

Size of Carton	Gross Weight of Carton	PCS/Carton
730x390x410mm	13.3kg±5%	1