


**Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W**



The Selectable Strip Linear Light can be widely used for indoor (damp locations) Excellent for hospitals,schools,shops,restaurants,storage rooms, supermarkets, etc.

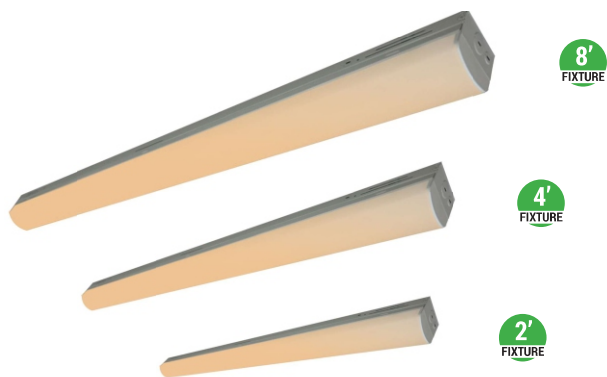

### FEATURES

- Luminous part is integrated and fastened to fixture body by snap-locks.
- End-caps adopt integrated bending technique.
- Field-adjustable light output and CCT.
- 12Vdc auxiliary dimming
- Motion sensor control available (Optional)

### WATT/CCT FIELD-ADJUSTABLE

Simply select desired CCT and Wattage before installation



Buckle design, Convenient disassembly and assembly


SPECIFICATION			
TYPE	WSD-ST2FT152025W27-3545K	WSD-ST4FT253040W27-3545K	WSD-ST8FT556065W27-3545K
WATTAGE	(2FT) 15W/20W/25W	(4FT) 25W/30W/40W	(8FT) 55W/60W/65W
LUMEN	2285 lm/3077lm/3719lm	3806 lm/4653lm/6100lm	8595 lm/9190 lm/9677 lm
EFFICACY	≥130 lm/W		
CCT	3500K/4000K/5000K		
DEFAULT SETTING	25W&4000K	40W&4000K	65W&4000K
CRI	80		
INPUT VOLTAGE	AC120-277V		
LIGHT ANGLE	112°		
POWER FACTOR	0.90		
DRIVER EFFICACY	86%		
DIMMING	0-10V Dimming		
WORKING TEMPERATURE	-4°F ~ 122°F		
LIFESPAN (L70)	100,000 hours		
PROTECTION LEVEL	Damp locations		
CABLE	NO CABLE		
WARRANTY	5 year limited		

## LED SELECTABLE LINEAR STRIP LIGHT - WSD Series

### Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W

#### DIMENSION

Unit:mm/inch

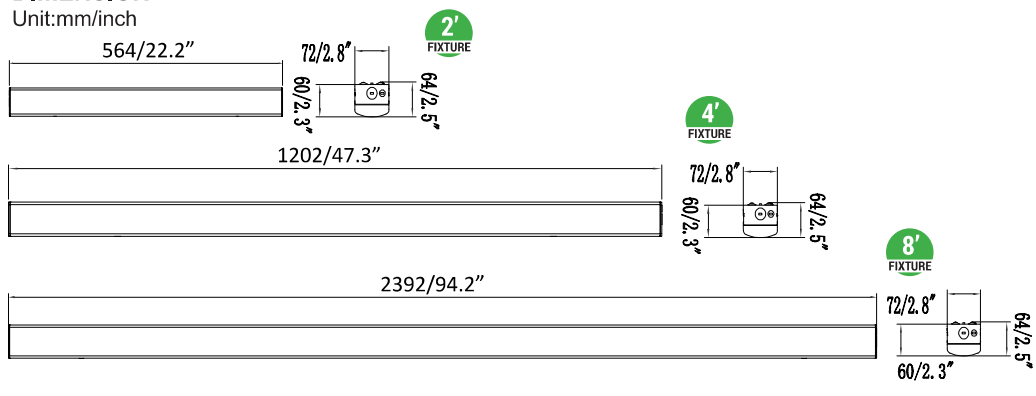

WATTAGE	15W/20W/25W
GR. WEIGHT	2.65 lbs (6 pcs/carton)
BOX DIM.	25.63" x 9.84" x 5.98"

WATTAGE	25W/30W/40W
GR. WEIGHT	4.41 lbs (6 pcs/carton)
BOX DIM.	50.59" x 9.84" x 5.98"

WATTAGE	55W/60W/65W
GR. WEIGHT	8.49 lbs (4 pcs/carton)
BOX DIM.	98.03" x 6.89" x 5.91"

#### EMERGENCY BACK-UP (SOLD SEPARATELY)



**WSD-EMS8W27-XX**  
8W Emergency Backup Battery  
LED Driver

**WSD-EMS15W27-XX**  
15W Emergency Backup Battery  
LED Driver

**WSD-EMS20W27-XX**  
20W Emergency Backup Battery  
LED Driver

#### CONTROL (SOLD SEPARATELY)



**ANT-3C**  
Microwave Motion Sensor



**RC-100**  
Microwave Sensor  
Remote Controller

#### STANDARD ACCESSORIES(standard)



**47.24 inch CABLE**  
(2FT,4FT,8FT)



**J-BOX COVER**  
(2FT,4FT,8FT)



**V-HOOK**  
(2FT,4FT,8FT)

#### STANDARD ACCESSORIES(SOLD SEPARATELY)



**WSD-ST-SMA**  
Surface Mount Accessories  
for Strip lights  
(2FT,4FT,8FT)



**WSD-ST-CROSS PIECE**  
Strip Light Connection  
Piece  
(2FT,4FT,8FT)



**WIRE GUARD**  
(2FT,4FT,8FT)

#### ORDERING INFORMATION

##### EXAMPLE:

**WSD-ST2FT152025W27-3545K-E[Blank,M] / WSD-ST4FT253040W27-3545K-E[Blank,M] / WSD-ST8FT556065W27-3545K-E[Blank,M]**


WSD	ST	2FT	152025	27	3545K	E
PRODUCT	PRODUCT	SIZE	WATTAGE	VOLTAGE	CCT	CONTROL
WSD (WSD LED INC)	ST (Strip Linear Light)	2FT (2-foot) 4FT (4-foot) 8FT (8-foot)	152025W - (15W/20W/25W) 253040W - (25W/30W/40W) 556065W - (55W/60W/65W)	27 - (120-277V)	3545K - (3500K/4000K/5000K)	M (Motion Sensor)

### Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W


#### PHOTOMETRICS

For complete IES files, please visit our website.


#### WSD-ST4FT253040W27-3545K (40W&3500K)

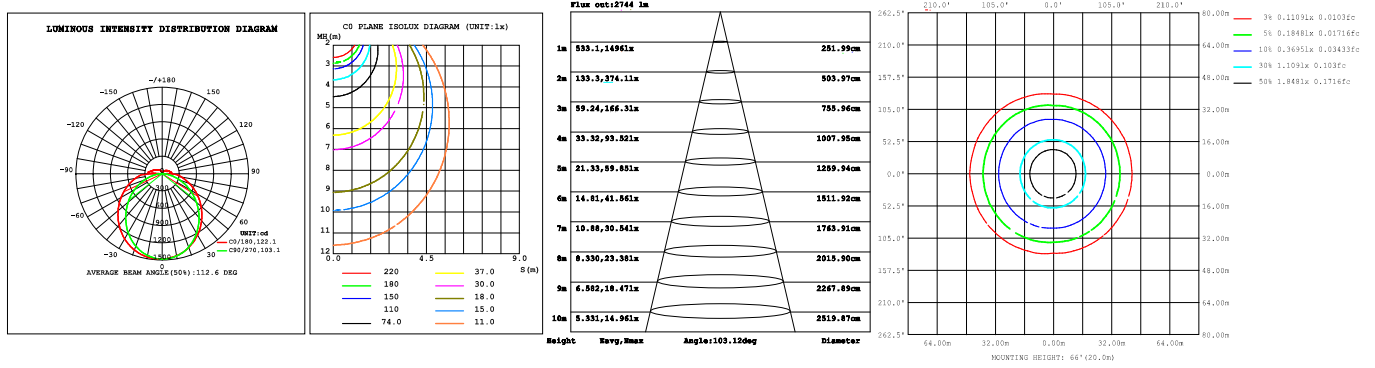

#### WSD-ST4FT253040W27-3545K (40W&4000K)

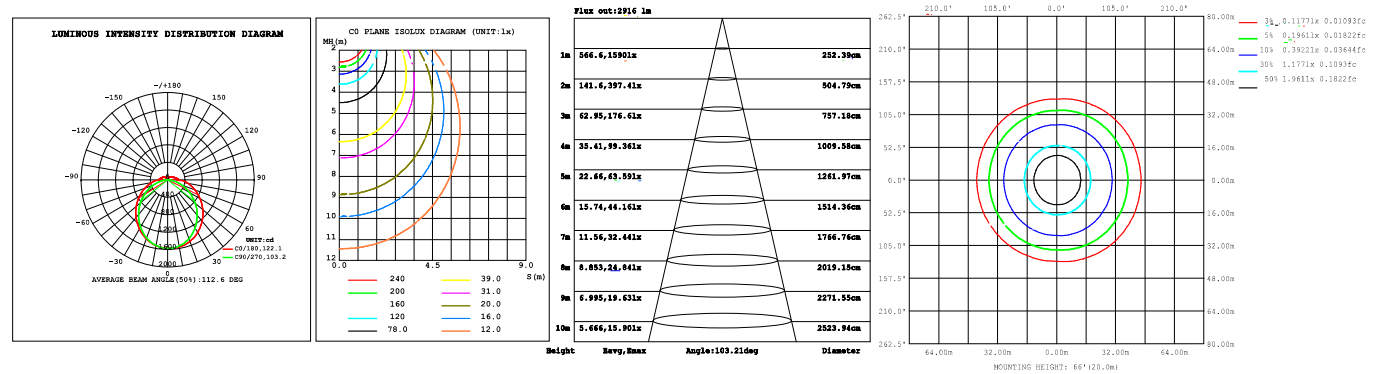

#### WSD-ST4FT253040W27-3545K (40W&5000K)

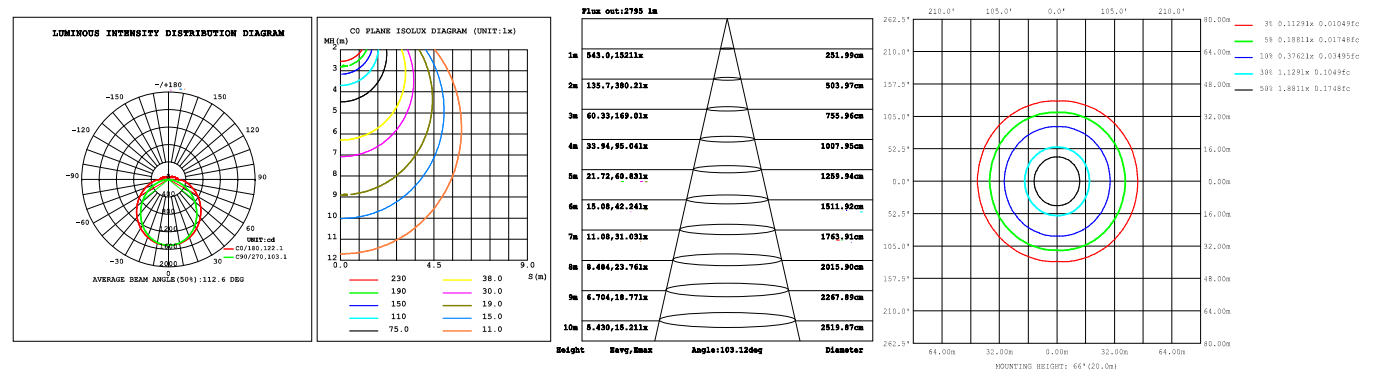


### Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W


#### PHOTOMETRICS

For complete IES files, please visit our website.

#### WSD-ST8FT556065W27-3545K (65W&3500K)

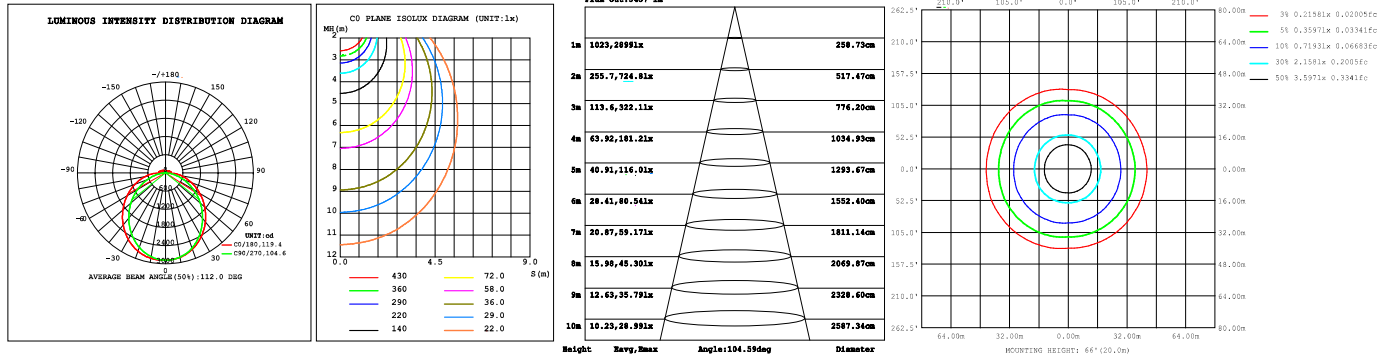

#### WSD-ST8FT556065W27-3545K (65W&4000K)

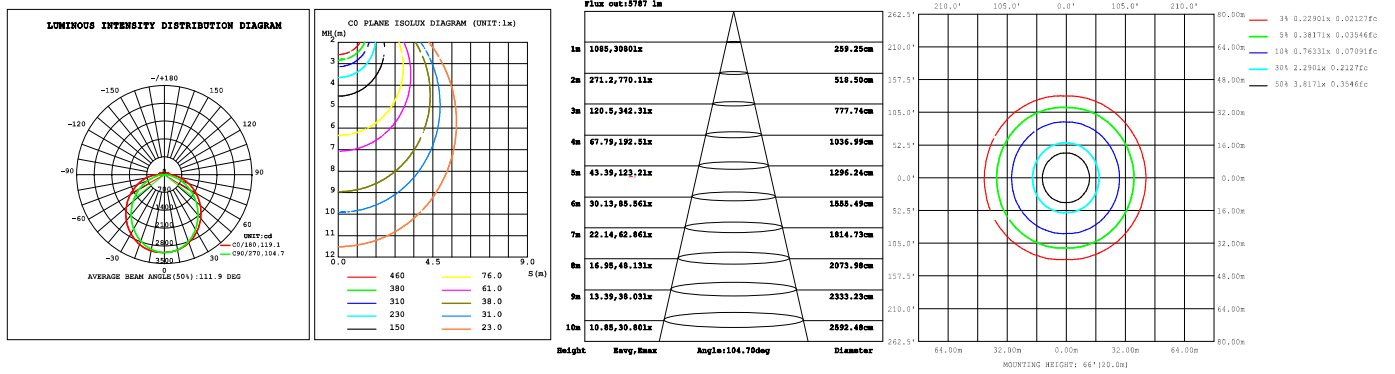

#### WSD-ST8FT556065W27-3545K (65W&5000K)

