



Features

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V / 277 - 480 V.
- Die Cast aluminium cooling design, high quality and better cooling for LED $T_j < 85^\circ\text{C}$.
- Excellent Optics design, greatly improve the light utilization and evenness.
- Motion sensor Control Available (Option)

Product Applications



WSD LEDUFO LED High Bay Light series can be widely used in outdoor lighting (Wet location), Excellent for Museums, Art Galleries, Underground parking lot, Buildings, The lawn, Industrial areas, Residential areas, Sidewalks, Parking lot, Schools and etc, and many more applications.



LED UFO HIGH BAY LIGHT - WSD Series G1 150W, 277-480V

Specifications

Unit : inch(mm)

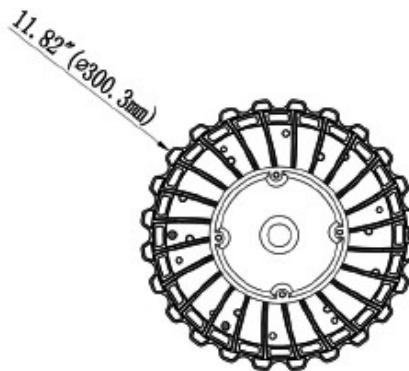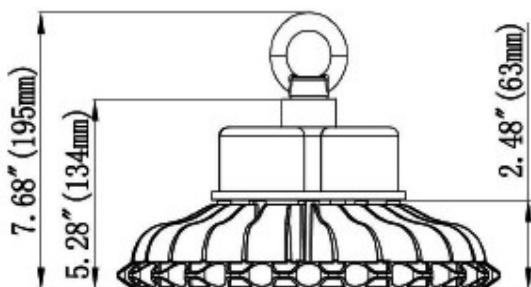




Structure Features

- Shell materials: Aluminum & PC.
- Finish: Black/White
- Net weight : 4.5Kg (9.9 lbs)
- Product Size: $\varnothing 300\text{mm} \times 195\text{mm}$
- Carton Size: $380\text{mm} \times 380\text{mm} \times 200\text{mm}$

Technical Parameters

WSD-UHB15W27-XXK-Z[D,W,B]-##[SS,MW]-M[Blank,M]			
Power	150W	Lighting Angle	75°
Input Voltage	AC120-277V/277-480V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	21000 Lm	Storage Temperature	-40 - +80°C
Color Temperature	4000K/5000K	Protection Level	Wet Location/IP65
CRI	Ra>70	Cable	3 core , 18AWG(1.0m)
Optional dimming function	1-10Vdc		

Photometry

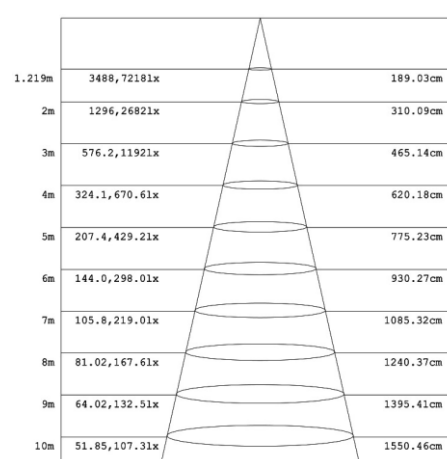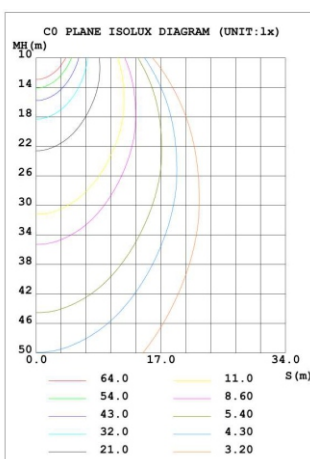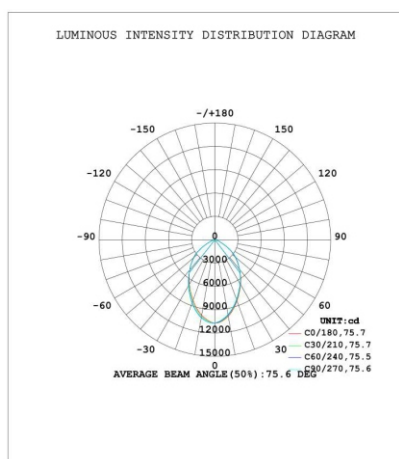

Example: WSD-UHB15W27-XXK-Z[D,W,B]-##[SS,MW]-M[Blank,M]

WSD	UHB	15W	27	XXK	Z	##	M
Company	Product	Power	Voltage	Color Temp	Finish	Driver	Control
	UHB	15W(150W)	27	40K(4000K)	D (Dark Bronze)	SS	M
WSD LED INC	UFO High Bay Light		AC120-277V	50K(5000K)±500K	B (Black)	SOSEN	Motion sensor
			48		W(White)	MW	
			AC277-480V			Mean Well	