

### Features

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V / 277 - 480 V.
- Die Cast aluminium cooling design, high quality and better cooling for LED  $T_j < 85^{\circ}\text{C}$ . Excellent Optics design, greatly improve the light utilization and evenness.
- Motion sensor Control Available (Option)

### Product Applications

WSD LED UFO LED High Bay Light series can be widely used in outdoor lighting (Wet location), Excellent for Museums, Art Galleries, Underground parking lot, Buildings, The lawn, Industrial areas, Residential areas, Sidewalks, Parking lot, Schools and etc, and many more applications.




## LED UFO HIGH BAY LIGHT - WSD Series G1 200W, 277-480V

### Specifications

Unit : inch(mm)

### Structure Features




- Shell materials: Aluminum & PC.
- Finish: Black/White
- Net weight : 5.0Kg (11 lbs)
- Product Size :  $\varnothing 350\text{mm} \times 210\text{mm}$
- Carton Size :  $450\text{mm} \times 450\text{mm} \times 215\text{mm}$

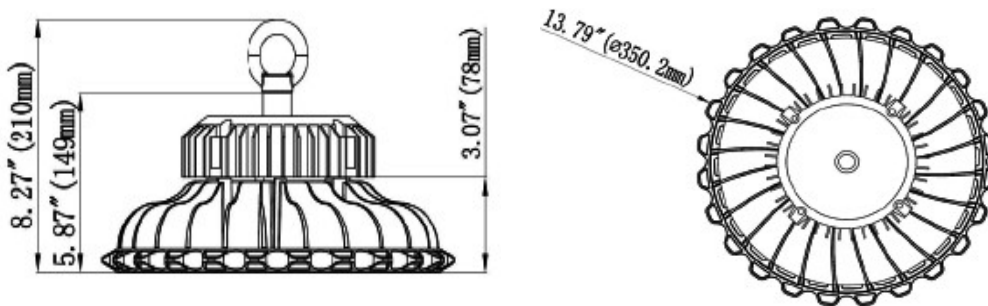

### Technical Parameters

WSD-UHB20W27-XXK-Z[D,W,B]-##[SS,MW]-M[Blank,M]			
Power	200W	Lighting Angle	92°
Input Voltage	AC120-277V/277-480V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	28000 Lm	Storage Temperature	-40 - +80°C
Color Temperature	4000K/5000K	Protection Level	Wet Location/IP65
CRI	Ra>70	Cable	3 core , 18AWG(1.0m)
Optional dimming function	1-10Vdc		

### Photometry

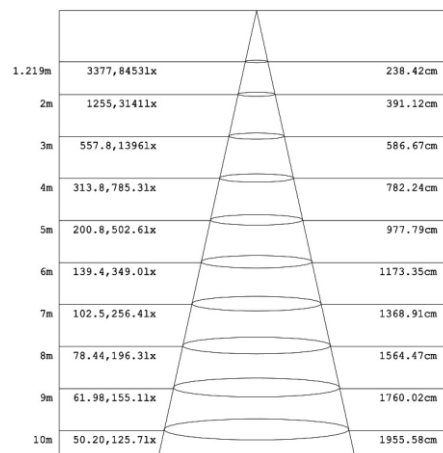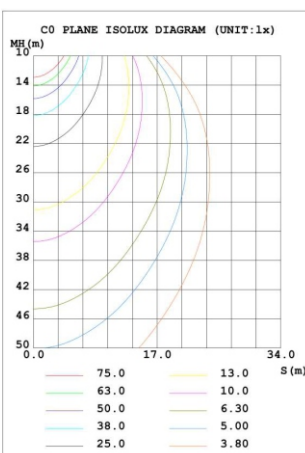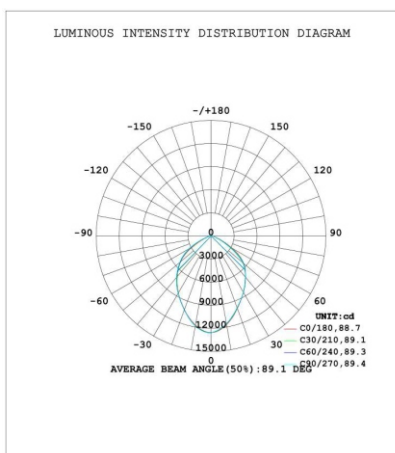

### Example: WSD-UHB20W27-XXK-Z[D,W,B]-##[SS,MW]-M[Blank,M]

WSD	UHB	20W	27	XXK	Z	##	M
Company	Product	Power	Voltage	Color Temp	Finish	Driver	Control
	UHB	20W(200W)	27	40K(4000K)	D (Dark Bronze)	SS	M
WSD LED INC	UFO High Bay Light		AC120-277V	50K(5000K)±500K	B (Black)	SOSEN	Motion sensor
			48		W(White)	MW	
			AC277-480V			Mean Well	