

### Wattages: 15W,25W



**CCT**  
SELECTABLE



The Wall Pack LED Lighting Series can be widely used for Indoor or Outdoor (Wet Location) Excellent for Museums, Art Galleries, Shopping Malls, Office Buildings, Walls and many other applications.



### Features:

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design, high quality and better cooling for LED  $T_j < 85^{\circ}\text{C}$ .
- Excellent Optics design, greatly improve the light utilization and evenness.
- The 1-10V Dimming type is continuous.

### Packaging information:

#### ❖WSD-WP015W27-345K:

Carton Size:545mmX230mmX285mm  
21.46"x9.06"x11.22" (12Pcs/CTN)


#### ❖WSD-WP025W27-345K:

Carton Size:545mmX230mmX285mm  
21.46"x9.06"x11.22" (12Pcs/CTN)

SPECIFICATION						
TYPE	WSD-WP015W27-345K			WSD-WP025W27-345K		
	15W			25W		
WATTAGE	15W			25W		
CCT	3000K	4000K	5000K	3000K	4000K	5000K
LUMEN	2130 lm	2246 lm	2218 lm	3423 lm	3656 lm	3571 lm
EFFICACY	> 150 lm/W					
CRI	> 70					
INPUT VOLTAGE	AC120-277V					
LIGHTING ANGLE	112.4°X105.3°					
FACTORY SETTINGS	4000K					
LED TYPE	2835					
PF	> 0.95					
DRIVER EFFICIENCY	> 89%					
PROTECTION LEVEL	WET					
LIFE TIME	> 50000 hours					
WARRANTY	5 year limited					

### Wattages: 15W,25W

#### DIMENSION:

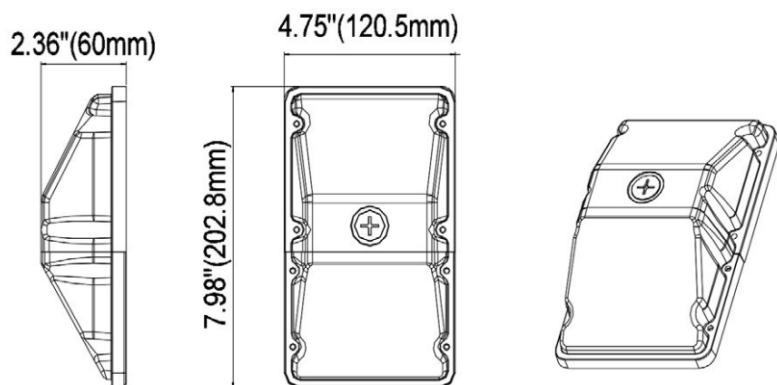

**15W/25W**

#### Specifications:

Shell materials: Aluminum & PC.  
 Net weight : 1.26 lbs  
 Finish: Dark Bronze(Standard)  
 Product Size:202.8mmX120.5mmX60mm  
 7.98"X4.75"X2.36"

#### Control Module:

The LED Wall Pack light can adjust the color temperature of the whole lamp, which is convenient and fast. The color temperature can be selected according to the actual needs of customers.



**CCT**  
SELECTABLE



#### ORDERING INFORMATION:

#### EXAMPLE:

**WSD-WP015W27-345K-Z[D,W,B,S]-Y[Blank,P] / WSD-WP025W27-345K-Z[D,W,B,S]-Y[Blank,P]**


WSD	WP	015	27	345K	Z	Y
COMPANY	PRODUCT	POWER	VOLTAGE	CCT	FINISH	CONTROL
WSD LED INC	WP Wall Pack light	015 (15W) 025 (25W)	27 AC120-277V	345K 3000K/4000K/5000K	D (Dark Bronze) W (White) B (Black) S (Silvery)	P (Photocell)

### Wattages: 15W,25W

#### PHOTOMETRICS:

For complete IES files, please visit our website.

#### WSD-WP015W27-345K (3000K)

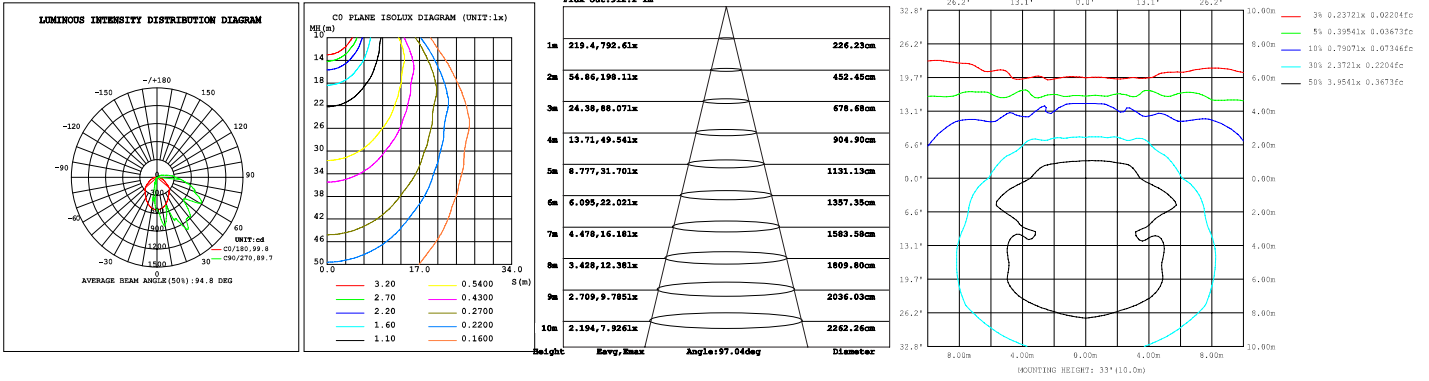

#### WSD-WP025W27-345K (3000K)

